

## PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark  
Office  
(Box PCT)  
Crystal Plaza 2  
Washington, DC 20231  
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing (day/month/year)

02 July 1999 (02.07.99)

International application No.

PCT/US98/23443

Applicant's or agent's file reference

BS116/171862

International filing date (day/month/year)

04 November 1998 (04.11.98)

Priority date (day/month/year)

04 November 1997 (04.11.97)

Applicant

BEDINGFIELD, James, C., Sr. et al

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

25 May 1999 (25.05.99)

☐ in a notice effecting later election filed with the International Bureau on:2. The election ☒ was☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

F. Zotomayor

Telephone No.: (41-22) 338.83.38

# PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

REC'D 17 JAN 2000

WIPO

PCT

Applicant's or agent's file reference 36968/171862	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/US98/23443	International filing date (day/month/year) 04 NOVEMBER 1998	Priority date (day/month/year) 04 NOVEMBER 1997
International Patent Classification (IPC) or national classification and IPC IPC(6): H04M 7/00 and US Cl.: 379/220		
Applicant BELLSOUTH INTELLECTUAL PROPERTY CORPORATION		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.


2. This REPORT consists of a total of 3 sheets.

☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority. (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 0 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of report with regard to novelty, inventive step or industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 25 MAY 1999	Date of completion of this report 08 NOVEMBER 1999
Name and mailing address of the IPEA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer  CREIGHTON SMITH
Facsimile No. (703) 305-3230	Telephone No. (703) 308-2488

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/US98/23443

**I. Basis of the report**

1. This report has been drawn on the basis of *(Substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments)*:

☒ the international application as originally filed.

☒ the description, pages 1-13 , as originally filed.

pages NONE , filed with the demand.

pages NONE , filed with the letter of \_\_\_\_\_

pages \_\_\_\_\_ , filed with the letter of \_\_\_\_\_

☒ the claims, Nos. 1-21 , as originally filed.

Nos. NONE , as amended under Article 19.

Nos. NONE , filed with the demand.

Nos. NONE , filed with the letter of \_\_\_\_\_

Nos. \_\_\_\_\_ , filed with the letter of \_\_\_\_\_

☒ the drawings, sheets/fig 1-7 , as originally filed.

sheets/fig NONE , filed with the demand.

sheets/fig NONE , filed with the letter of \_\_\_\_\_

sheets/fig \_\_\_\_\_ , filed with the letter of \_\_\_\_\_

2. The amendments have resulted in the cancellation of:

☒ the description, pages none .

☒ the claims, Nos. none .

☒ the drawings, sheets/fig none .

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the ~~Supplemental Box~~ Additional observations below (Rule 70.2(c)).

4. Additional observations, if necessary:

NONE

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/US98/23443

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement****1. STATEMENT**

Novelty (N)	Claims <u>1-21</u>	YES
	Claims <u>none</u>	NO
Inventive Step (IS)	Claims <u>1-21</u>	YES
	Claims <u>none</u>	NO
Industrial Applicability (IA)	Claims <u>1-21</u>	YES
	Claims <u>none</u>	NO

**2. CITATIONS AND EXPLANATIONS**

Claims 1-21 meet the criteria set forth in PCT Article 33(2)-(4) because the prior art does not teach an SCP that will provide routing instructions to an SSP based upon that line's resold routing information.

----- NEW CITATIONS -----

NONE

# PATENT COOPERATION TREATY

From the INTERNATIONAL SEARCHING AUTHORITY

To: JOHN S. PRATT  
KILPATRICK STOCKTON LLP  
1100 PEACHTREE STREET, SUITE 2800  
ATLANTA, GA. 30309 4530

## PCT

### NOTIFICATION OF TRANSMITTAL OF THE INTERNATIONAL SEARCH REPORT OR THE DECLARATION

(PCT Rule 44.1)

Applicant's or agent's file reference BS116/171862	Date of Mailing (day/month/year) <b>12 APR 1999</b>
International application No. PCT/US98/23443	International filing date (day/month/year) 04 NOVEMBER 1998
Applicant BELLSOUTH INTELLECTUAL PROPERTY CORPORATION	

1. ☒ The applicant is hereby notified that the international search report has been established and is transmitted herewith.  
**Filing of amendments and statement under Article 19:**  
 The applicant is entitled, if he so wishes, to amend the claims of the international application (see Rule 46):  

**When?** The time limit for filing such amendments is normally 2 months from the date of transmittal of the international search report; however, for more details, see the notes on the accompanying sheet.  
  
**Where?** Directly to the International Bureau of WIPO  
 34, chemin des Colombettes  
 1211 Geneva 20, Switzerland  
 Facsimile No.: (41-22) 740.14.35  
  
**For more detailed instructions, see the notes on the accompanying sheet.**
  
2. ☐ The applicant is hereby notified that no international search report will be established and that the declaration under Article 17(2)(a) to that effect is transmitted herewith.
  
3. ☐ With regard to the protest against payment of (an) additional fee(s) under Rule 40.2, the applicant is notified that:
 

☐ the protest together with the decision thereon has been transmitted to the International Bureau together with the applicant's request to forward the texts of both the protest and the decision thereon to the designated Offices.  
☐ no decision has been made yet on the protest; the applicant will be notified as soon as a decision is made.
  
4. **Further action(s):** The applicant is reminded of the following:  
 Shortly after 18 months from the priority date, the international application will be published by the International Bureau. If the applicant wishes to avoid or postpone publication, a notice of withdrawal of the international application, or of the priority claim, must reach the International Bureau as provided in rules 90 bis 1 and 90 bis 3, respectively, before the completion of the technical preparations for international publication.  
  
 Within 19 months from the priority date, a demand for international preliminary examination must be filed if the applicant wishes to postpone the entry into the national phase until 30 months from the priority date (in some Offices even later).  
  
 Within 20 months from the priority date, the applicant must perform the prescribed acts for entry into the national phase before all designated Offices which have not been elected in the demand or in a later election within 19 months from the priority date or could not be elected because they are not bound by Chapter II.

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231  Facsimile No. (703) 305-3230	Authorized officer CREIGHTON SMITH <i>James R. Matthews</i>  Telephone No. (703) 308-2488
---	--

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference BS116/171862	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/US98/23443	International filing date ( <i>day/month/year</i> ) 04 NOVEMBER 1998	(Earliest) Priority Date ( <i>day/month/year</i> ) 04 NOVEMBER 1997
Applicant BELLSOUTH INTELLECTUAL PROPERTY CORPORATION		

This international search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This international search report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. ☐ Certain claims were found unsearchable (See Box I).
2. ☐ Unity of invention is lacking (See Box II).
3. ☐ The international application contains disclosure of a nucleotide and/or amino acid sequence listing and the international search was carried out on the basis of the sequence listing
  - ☐ filed with the international application.
  - ☐ furnished by the applicant separately from the international application,
    - ☐ but not accompanied by a statement to the effect that it did not include matter going beyond the disclosure in the international application as filed.
  - ☐ transcribed by this Authority.
4. With regard to the title,
  - ☒ the text is approved as submitted by the applicant.
  - ☐ the text has been established by this Authority to read as follows:
5. With regard to the abstract,
  - ☐ the text is approved as submitted by the applicant.
  - ☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.
6. The figure of the drawings to be published with the abstract is:
 

Figure No. 1

  - ☐ as suggested by the applicant.
  - ☒ because the applicant failed to suggest a figure.
  - ☐ because this figure better characterizes the invention.

☐ None of the figures.

## Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

A method and system for routing service calls made from lines resold to a competitive service provider includes advanced intelligent network and standard switching functionality. The call may be made into an AIN service switching point (60) or a non-AIN switch (62-64). All calls are routed to an AIN hub (190), such as a service switching point, via a trunk group. The AIN or non-AIN switch may access a line class code table (160-164) to determine the proper routing information. Calls made from resold lines are routed to the AIN hub (190). Once the call is routed to the non-AIN hub, a trigger (187) provisioned on the AIN hub and assigned to the incoming trunk group causes the hub to suspend the call and launch a query to a service control point (200). The query includes the directory number of the resold calling line and the originally dialed number. The SCP (670) accesses a database (675) containing directory numbers for resold lines and identifiers for competitive service providers. Once the carrier is located, additional tables may be accessed to determine the routing information specified by the carrier for handling the call. The routing information is transmitted by the SCP (670) back to the SSP (610). The SSP (610) then routes the call to the specified location.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/23443

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :H04M 7/00

US CL :379/220

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 379/220

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
noneElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
none**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,475,749 A (AKINPELU et al) 12 December 1995, see entire document	1-21
Y	US 5,550,912 A (AKINPELU et al) 27 August 1996, see entire document	1-21
Y,P	US 5,796,813 A (SONNENBERG) 18 August 1998, see entire document	1-21

☐

Further documents are listed in the continuation of Box C.

☐

See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*B* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

04 JANUARY 1999

Date of mailing of the international search report

12 APR 1999

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

CREIGHTON SMITH

Telephone No. (703) 308-2488



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04M 7/00</b>		<b>(11) International Publication Number:</b> <b>WO 99/23808</b>
<b>A1</b>		<b>(43) International Publication Date:</b> 14 May 1999 (14.05.99)
<b>(21) International Application Number:</b> PCT/US98/23443		
<b>(22) International Filing Date:</b> 4 November 1998 (04.11.98)		
<b>(30) Priority Data:</b> 60/064,230      4 November 1997 (04.11.97)      US		
<b>(71) Applicant (for all designated States except US):</b> BELLSOUTH INTELLECTUAL PROPERTY CORPORATION [US/US]; Suite 510, 824 Market Street, Wilmington, DE 19801 (US).		
<b>(72) Inventors; and</b>		
<b>(75) Inventors/Applicants (for US only):</b> BEDINGFIELD, James, C., Sr. [US/US]; 67 Blue Springs Court, Lilburn, GA 30047 (US). HOLT, Scott, C. [US/US]; 3101 Trolley Square Crossing, Atlanta, GA 30306 (US). LAPIERRE, Stephen, R. [US/US]; P.O. Box 204, Union City, GA 30291 (US).		
<b>(74) Agents:</b> PRATT, John, S. et al.; Kilpatrick Stockton LLP, Suite 2800, 1100 Peachtree Street, Atlanta, GA 30309-4530 (US).		
<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).		

**Published**


*With international search report.*

*Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

**(54) Title:** METHOD AND SYSTEM FOR ROUTING SERVICE CALLS MADE FROM RESOLD LINES

**(57) Abstract**

A method and system for routing service calls made from lines resold to a competitive service provider includes advanced intelligent network and standard switching functionality. The call may be made into an AIN service switching point (60) or a non-AIN switch (62-64). All calls are routed to an AIN hub (190), such as a service switching point, via a trunk group. The AIN or non-AIN switch may access a line class code table (160-164) to determine the proper routing information. Calls made from resold lines are routed to the AIN hub (190). Once the call is routed to the AIN hub, a trigger (187) provisioned on the AIN hub and assigned to the incoming trunk group causes the hub to suspend the call and launch a query to a service control point (200). The query includes the directory number of the resold calling line and the originally dialed number. The SCP (670) accesses a database (675) containing directory numbers for resold lines and identifiers for competitive service providers. Once the carrier is located, additional tables may be accessed to determine the routing information specified by the carrier for handling the call. The routing information is transmitted by the SCP (670) back to the SSP (610). The SSP (610) then routes the call to the specified location.

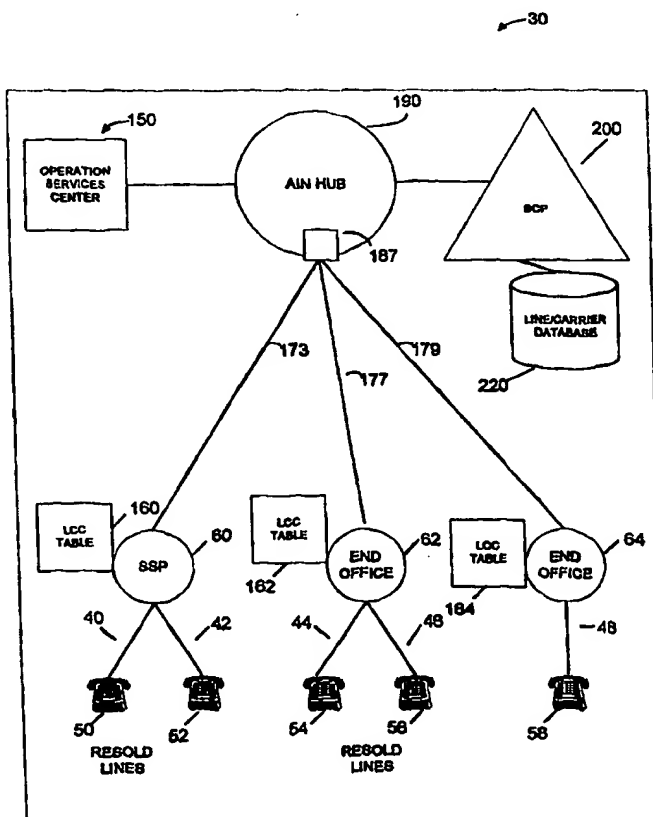

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

# METHOD AND SYSTEM FOR ROUTING SERVICE CALLS MADE FROM RESOLD LINES

5

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention is directed to a method and system for routing telephone service calls, including directory information, operator-assistance, and service repair calls made from resold lines. More particularly, this invention is directed to a method and system that routes service calls from resold lines using hybrid advanced intelligent network and switching functionality.

### 2. Background

The current telecommunications market includes a group of incumbent local exchange carriers ("ILECs") that own switching infrastructures and possess intelligent network capabilities. Each ILEC provides local telephone service for a particular geographic region of the country. This group of ILECs has existed for many years, and only recently have smaller carriers attempted to enter the market to establish a foothold. To enter the market, a carrier would be required to create its own switching infrastructure and intelligent network capabilities. Such a project would require the carrier to construct new telephone lines and cables, route those lines to each desired home, and create the necessary switching functionality. Clearly, this effort would cost millions, perhaps billions, of dollars for each emerging carrier.

Pursuant to the Telecommunications Act of 1996, the FCC has mandated certain "interconnection" requirements to make it easier for new carriers to enter a local telecommunications market. In FCC Report & Order in the matter of Local Competition, docket 96-98 released August 8, 1996, the FCC required ILECs to "unbundle" certain elements of their existing telecommunications network. "Unbundling" is a regulatory requirement providing competitive local exchange carriers ("CLECs") or other service providers the ability to separately lease discrete functional components of an ILEC's network to provide service. An unbundled local loop, for example, is an ILEC-provided transmission path between, and including, the

customer network interface (e.g., the jack) located at the end-customer's premises and the central office loop termination located in the ILEC's central office building. As another example, an unbundled port provides a service provider with local switching functionality, separate from the local loop, on an ILEC's switch as an alternative to providing a stand-alone switch. Numerous components may be unbundled, including the local loop, switch ports, and Advanced Intelligent Network ("AIN") triggers. If the loop and the port are rented to a service provider, however, the entire line is considered "resold."

In a resale environment, end customers on resold lines may still obtain certain services, such as operator-assisted service, directory information service ("411" and LNPA-555-1212, where "LNPA" is the Local Numbering Plan Area (i.e., the area code)), repair service ("611"), LNPA-555-1212 calls, and 976/900 number blocking, for example. Although the line has been resold, the customer remains connected to the ILEC's switch. Thus, when a resold customer dials 411 or 611, she will be connected to the ILEC's directory assistance operator or repair service operator, respectively. The customer will receive a bill from the service provider that owns the resold line. This scenario is often undesirable for the service provider. The service provider would prefer the option of having such calls be routed to its own operators who can provide a specific type of service.

To allow service providers to select their own locations for handling service calls, certain ILECs have incorporated methods within their network to identify individual lines as being resold. The use of line class codes is one such method for identifying resold lines. A line class code is a code within the ILEC's end office switch that is used to index a routing profile for a particular class of service. Each class of service, including various configurations of residential and business services, is assigned a line class code. The switch uses the line class code to determine the proper routing for the call. Each time a new service provider is introduced, a new set of line class codes corresponding to the existing line class codes may be assigned. This solution is not entirely feasible because a new line class code must be assigned potentially for every class of service and for every carrier. Moreover, the line class codes must be replicated in every switch. While ILECs have taken measures to

prevent running out of line class codes, these codes are still considered limited resources.

Alternatively, ILECs may add new software directly to the switch to determine the proper routing for service calls made on resold lines. This would require modifying each switch in the ILEC's network. Switch vendors, however, have indicated that the capability to implement such modifications is years away and would be prohibitively expensive. In addition, making routing modifications in every switch would be very time-consuming.

The use of a pure advanced intelligent network ("AIN") method is a third option for ILECs. In an AIN environment, network nodes work autonomously and make decisions on routing and call handling without human intervention. Databases are often used to store information on how certain calls should be routed, or how calls should be handled. AIN triggers are also used to instruct various nodes on where to route calls and/or how to handle such calls. Unfortunately, the pure AIN solution has drawbacks. First, all of the ILEC's switches may not be AIN-compatible, thus making a complete AIN solution impossible. Second, all calls do not automatically cause an AIN trigger to fire. Thus, certain nodes would not detect certain calls as having been made from a resold line. As a result, such call would not be properly routed to the service provider's desired location.

## SUMMARY OF THE INVENTION

The present invention overcomes the problems of the prior art by providing a hybrid AIN/switching solution. More particularly, the method and system of this invention allows service providers to route service calls to predetermined service locations from lines that are coupled to AIN or non-AIN switches. All calls are routed to a central AIN hub, such as a service switching point. The AIN hub transmits a query to a service control point that accesses a database to provide routing instructions for the hub. The AIN hub then routes the call to the predetermined service location.

Service calls may be made from resold lines terminating at AIN or non-AIN switches. The switch uses line class code tables to determine the proper routing for the service call. Rather than use multiple sets of line class codes for each service provider, however, this invention uses a single set of line class codes for all resold

lines. The line class codes for resold lines reference the AIN hub. Unlike previous methods, valuable storage space and memory within the switch are not consumed by the addition of resold lines. Instead, resold lines are all assigned the single set of line class codes that reference a trunk group to the AIN hub. Thus, this invention is a more efficient alternative for service providers.

The AIN hub may be an AIN-capable switch, such as a service switching point. The hub is provisioned with a call origination AIN trigger, such as, for example, an off-hook delayed trigger. The trigger is assigned to the incoming trunk groups from the end office switches. The call origination trigger assigned to the trunk groups causes the hub to suspend each incoming call and query a service control point for routing instructions. The use of a centralized AIN hub also removes the burden of routing calls from the end office switches. Since all calls are ultimately routed to the hub, these end offices simply perform the line class code search and route all calls from resold lines to the hub.

The AIN hub transmits a query to a service control point. The query includes the directory number of the resold line and the dialed number. The service control point receives the query and accesses one or more databases to determine the routing information for handling the call as specified by the service provider. The database includes at least two tables. The first table matches the directory number of the resold line to the service provider that owns the line. The service provider may be identified by name or number. Once the service provider is identified, the service control point searches additional tables to determine the routing information. These tables may include routing information for each type of service call for each carrier and, possibly, based on the caller's location. Once the routing information is obtained, the service control point sends the routing information back to the AIN hub.

The AIN hub receives the routing information from the service control point and routes the service call as specified. The carrier may then handle the call in the appropriate manner.

As additional service providers are added, the system may be easily configured or reconfigured. Once the line is identified as a resold line, the set of line class codes for resold lines will cause the switch to route all service calls from the resold line to the AIN hub. The service provider can specify various locations for handling different

types of service calls. These locations are stored in the service control point which will return the proper routing information to the AIN hub. The AIN hub will then route the service call to the specified location. Unlike the prior art scenario, each switch does have to be reconfigured.

5           Generally described, this invention is a system for routing a service call made from a resold calling line. The system includes a switch coupled to the line, the switch being operative to route the service call to a trunk group; a service switching point coupled to the trunk group, the switch having a trigger provisioned thereon to cause the switch to launch a query to a service control point upon receiving the call from the  
10           trunk group; and a service control point operative to receive the query from the service switching point and to provide routing instructions to the service switching point based upon routing information stored in at least one database coupled to the service control point, the routing information specifying instructions for handling the service call.

          In another embodiment of this invention, a method for routing a service call  
15           made from a resold calling line includes the steps of: routing the service call to a switch; routing the service call from the switch to a trunk group; routing the service call from the trunk group to a service switching point; transmitting a query from the service switching point to the service control point to determine a location for handling the service call, the query including a directory number of the calling line and a called  
20           number; accessing a database containing an identifier for the service provider and instructions for handling the service call; transmitting the instructions to the service switching point; and routing the call from the service switching point to the location for handling the service call.

          Accordingly, it is an object of this invention to provide a system for routing  
25           service calls made from lines resold to competitive service providers.

          It is a further object of this invention to provide a system for routing service calls made from resold lines coupled to advanced intelligent network switches.

          It is yet another object of this invention to provide a system for routing service calls made from resold lines coupled to non-advanced intelligent network switches.

30           It is an additional object of this invention to provide a system for routing service calls that eliminates the need for multiple line class codes for each carrier and each type of service.

It is a further object of this invention to provide a system for routing service calls that allows a service provider to specify the location for handling the service call.

It is an additional object of this invention to provide a system for routing service calls that allows a service provider to specify multiple locations for handling various types of service calls.

It is an additional object of this invention to provide a system for routing service calls that includes a central hub, thus making it easier to configure and reconfigure network elements when service providers and classes of service are added.

It is a further object of this invention to provide a system for routing service calls that incorporates AIN solutions to make call routing more flexible than non-AIN solutions.

Additional objects and advantages of the invention will be set forth in part in the description which follows and in part will be obvious from the description or may be learned by practice of the invention. The objects and advantages of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a block diagram of an ILEC telephone network 30, according to a preferred embodiment of the present invention.

FIGURE 2 is an example of a prior art line class code/screening index table as stored in a database.

FIGURE 3 is a line class code table, according to a preferred embodiment of the present invention.

FIGURE 4 is a block diagram of a Calling Party Number-to-Carrier Table stored in a Line/Carrier database.

FIGURE 5 is a block diagram of a Carrier Routing table as stored in the Line/Carrier database.

FIGURE 6 is a block diagram of a network illustrating the method and system of this invention.

FIGURE 7 is an illustration of an exemplary Calling Party Number-to-Carrier table in Line/Carrier database.



FIGURE 8 is an illustration of an exemplary Carrier Routing Table.

FIGURE 9 is a flow chart illustrating the steps performed using the method and system of this invention.

## DETAILED DESCRIPTION

Reference will now be made in detail to the invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

FIGURE 1 is a block diagram of an ILEC telephone network 30, according to a preferred embodiment of the present invention. The network 30 includes a plurality of telephone lines 40-48 coupling terminating equipment, such as, for example, a group of telephones 50-58 to one or more end offices 60-64. Although telephones are illustrated as the terminating equipment in FIGURE 1, those skilled in the art will understand that such terminating equipment may include other telecommunication devices including, but not limited to, facsimile machines, computers, modems, etc. Certain of the telephone lines 40-46 are lines that have been resold by the ILEC to one or more competitive service providers. The resold lines 40-46 may be for home/personal use or for business/commercial use. Each of the resold lines 40-42 may include one or more services offered by the service provider, including, but not limited to 411 directory assistance, 611 emergency repair, LNPA-555-1212, operator-assisted calls, and the blocking of 976 and/or 900 numbers. Each resold line allows a calling party (not shown) to dial a called party or a service number. In this exemplary embodiment the service provider has designated one or more operation services center 150 for accepting service calls from resold lines. It should be apparent that the service provider may designate multiple services centers for handling various types of service calls.

The resold lines extend from the called party's residence or business to end offices 60-64 operated by the ILEC. The end offices 60-64 connect subscribers in the network to each other and to other end offices via a trunk group. The end offices include serving switches that allow calls to be switched to and from other calling areas. End office 60 is an AIN-end office, such as a service switching point ("SSP"). An SSP typically includes switch functionality, but also includes other functionality so as to

communicate with other AIN elements as those skilled in the art understand. End offices 62-64 are non-AIN end offices. The end offices in FIGURE 1 are illustrated for exemplary purposes only. This invention may be used for resold lines coupled to either AIN end offices or non-AIN end offices. The network 30 may include additional elements, such as signal transfer points (not shown) that route calls between SSPs and other network elements. For further information regarding AIN technology and aspects thereof, the interested reader is referred to U.S. Patent No. 5,430,719, to Weisser, which is incorporated herein by reference.

End offices 60-64 include line class code ("LCC") tables 160-164, respectively, that contain line class codes and screening indices for various classes of services. FIGURE 2 is an example of a prior art line class code table 220 as stored in an end office. Each line owned by the ILEC is assigned a particular line class code depending upon the service provider owning the line and the class of service available for that line. As shown, the table 220 includes a line class code column 230, and a plurality of service columns 240-260 for various types of service. In the exemplary table 220, line class codes 110, 112, 113, and 114 are codes for ILEC-owned lines. Line class codes 210, 212, 213, and 214 are assigned to lines owned by another service provider (e.g., "Service Provider 2"). Line class codes 310, 312, 313, and 314 are assigned to lines owned by a third service provider (e.g., "Service Provider 3"). The service columns specify whether the class of service for the particular line class code includes a particular service. The routing information column 270 then specifies the routing information for that class of service. For example, the table 220 indicates that the ILEC-owned lines having line class code 110 may make operator-assisted calls, 411 calls, and 611 calls. ILEC-owned lines having line class code 112 may only make operator-assisted service calls and 411 calls. Similarly, the lines owned by the other service providers having line class code 210 and 310 may make all three types of calls. As new service providers are added, the entire set of service classes must be replicated and a new set of line class codes must be assigned for the replicated service class. In the table 220, for example, lines having line class codes 10, 110, and 210 share the same type of service, yet each line has different line class codes.

FIGURE 3 is a screening index table 300, according to this invention. All resold lines are assigned one new set of line class codes without regard to the service

provider. The table 300 thus includes a line class code column 310 containing the class code for a line. Line class codes 110, 112, 113, and 114 are ILEC line class codes.. Line class codes 210, 212, 213, and 214 are resold line class codes. Service columns 320-340 identify particular types of service that the line may or may not include. The routing information column 350 contains routing information for each line class code and class of service. In the present invention, the routing information for all resold line class codes specifies that the service call be routed to an AIN hub.

In this invention, all service calls made from resold lines are routed to an AIN hub 190 (FIGURE 1). Calls may be routed using a routing index in the line class code table. The trunk groups terminate on ports in an AIN hub element 190. The AIN hub 190 is an AIN-capable end office, such as a service switching point. Any AIN-capable switch in the network may be designated the AIN hub 190. Although one AIN hub 190 is illustrated in FIGURE 1, a network may contain numerous AIN hubs.

To notify the AIN hub 190 that AIN functions must be invoked (i.e., a query to a Service Control Point), the trunk groups 173, 177, 179 terminating at the AIN hub 190 are each assigned an off-hook delayed ("OHD") AIN trigger 187. Triggers are assigned on a per-trunk basis. The OHD trigger is normally associated with individual subscriber lines, rather than inter-switch trunk connections, as used in the present invention. When used with individual subscriber lines, the switch assigned to the line recognizes an OHD trigger upon receiving a valid number sequence following an off hook condition. The use of an OHD trigger in connection with inter-switch trunk connections, however, causes the AIN hub 190 to suspend all calls from that trunk group and launch a query to an SCP. Since the trunk group is designated specifically for routing service calls pursuant to this invention, the use of the OHD trigger in this manner is not cumbersome..

In response to the OHD trigger, the AIN hub 190 suspends the call and launches a query to an AIN Service Control Point ("AIN SCP") 200. As part of the query, the AIN hub 190 provides the AIN SCP 200 with the calling number of the calling party and the service number dialed by the calling party. The AIN SCP 200 is a computer server that accesses one or more databases and returns information to other network components based on service-specific programming. The SCP 200 receives

call information in a query from the AIN hub 190 and translates query information (i.e., the calling number and dialed number) into routing instructions for the AIN hub 190. In this invention, AIN SCP 200 accesses a Line/Carrier database 220 containing information regarding the calling party's carrier and call type.

5           The Line/Carrier database stores several accessible tables, including a Calling Party Number-to-Carrier Table 400. FIGURE 4 is an illustration of an exemplary Calling Party Number-to-Carrier Table 400 stored in Line/Carrier database 220. The table 400 includes a Calling Party Directory Number column 420 containing a list of  
10           Calling Party numbers for resold lines, and a Local Exchange Carrier column 440 containing local exchange carrier identifiers corresponding to each calling party number. The local exchange carrier may be identified by name, number, or any other method for identifying a carrier. The AIN SCP 200 accesses the database 220 and searches the Calling Party Number-to-Carrier Table 400 for the calling party number provided by the AIN hub 190. Upon finding the calling party number in the Calling  
15           Party Number column 420, the AIN SCP 220 references the corresponding Local Exchange Carrier identifier in the Local Exchange Carrier column 440.

          The AIN SCP 200 then uses the local exchange carrier identifier to access a Carrier Routing table 500 stored in the Line/Carrier database 220. FIGURE 5 is a  
20           block diagram of an exemplary Carrier Routing table 500 as stored in the Line/Carrier database 220. The Carrier Routing table 500 includes a Local Exchange Carrier Identifier column 520, and a plurality of call type columns 530, 540, 550. The Local Exchange Carrier column 520 stores a plurality of identifiers for various local exchange carriers. The identifiers correspond to the identifiers found in the Local Exchange Carrier column 440 of the Calling Party Number-to-Carrier Table 400.  
25           Thus, the AIN SCP 200 uses the identifier obtained from the Calling Party Number-to-Carrier Table 400 to locate the carrier in the Carrier Routing table 500. Each local exchange carrier may desire that calls be routed to different locations within the network (or to other networks) depending upon the type of service call. Accordingly, once the AIN SCP 200 finds the appropriate local exchange carrier identifier, it also  
30           locates the appropriate Call Type column depending upon the call type. For instance, in FIGURE 5, call type #1 may correspond to 411 calls, call type #2 may correspond to 611 calls, call type #3 may correspond to operator-assisted calls, etc. It should be

apparent, however, that other service calls and non-service calls may be handled using a similar table. Once the correct carrier and call type have been located, the routing information may be obtained from that entry. The routing information may be any known type of routing information, including a routing index, a directory number, a carrier code or any combination of these. Other tabular information in the SCP may be used to make additional routing decisions based on, for example, the area in which the caller is located.

The AIN SCP 200 transmits the original calling number, the routing information, the dialed number, and the local exchange carrier identifier to the AIN hub 190. The routing index points to a set of trunks specified by the local exchange carrier in the Carrier Routing table. The AIN hub 190 transmits, as supported by the trunk type, the calling number, the dialed number, and the local exchange carrier identifier to the trunk group designated by the routing information. The call may then be handled by the service provider as it chooses.

With continuing reference to FIGURES 1-5, and now turning to FIGURE 6, the exemplary operation of this invention is described in the context of a subscriber to a competitive service provider placing a service call to "411" directory information. It will be appreciated by one skilled in the art that this invention is not limited to use of "411" calls, but may also include other service calls, including, but not limited to operator assistance calls, telephone repair calls, and collect calls.

In this example, a calling party ("Joe") having a calling party number (770-555-1234) uses his telephone 602, which is connected by calling line 604 to end office 610. In this example, end office 610 is an AIN-capable end office (i.e., an SSP). Joe places a call to "411" directory information. Joe subscribes to a competitive service provider ("CLEC 1"). CLEC 1, which is identified in the network by the identifier "604", has requested that all directory information calls be routed to a directory information service center 640 within the network. The service center 640 has a routing index number of "RI209". The ILEC, by arrangement, has stored the routing index for the information service center 640 within its AIN SCP databases.

As a result of Joe dialing "411", the SSP 610 accesses a line class code table 614. Within the table, the calling line is identified as a resold line of a particular class.

The table 614 includes a routing index (or other routing identifier) for an AIN hub 650 within the network. The SSP 610 then routes the call to the AIN hub 650.

An OHD trigger assigned to the trunk group terminating at the AIN hub causes the AIN hub 650 to suspend the incoming call and query an SCP 670. The AIN hub  
5 650 transmits a query to the SCP 670 containing the calling party number (770-555-1234) and the originally dialed number ("411"). The SCP 670 accesses a database 675 to determine where the call should be routed.

FIGURE 7 is an illustration of an exemplary Calling Party Number-to-Carrier table 700 in Line/Carrier database 675. As shown, Joe's number is listed among the  
10 various calling party numbers in the Calling Party Number column 720. The Local Exchange Column 720 Carrier lists "604," the identifier for CLEC 1, as Joe's carrier.

Once CLEC 1 is identified as the carrier for Joe, the SCP searches the Carrier Routing Table in the database 675. The SCP 670 uses the carrier identifier obtained from the Calling Party Number-to-Carrier table 700 to obtain the routing instructions.  
15 FIGURE 8 is an illustration of an exemplary Carrier Routing Table 800. As illustrated, the carrier, CLEC 1, has routing instructions for operated-assisted, 411, and 611 calls. The SCP 670 finds the service provider identifier in the table 800. Next, the SCP 670 obtains the routing instructions for 411 calls for subscribers of that carrier. As show, the carrier has specified that 411 calls be routed to routing index number RI209--the  
20 routing index number for the service center 640. Accordingly, the SCP 670 transmits the routing index number back to the SSP 610.

The SSP 610 routes the call to the routing index specified by the SCP 670. The call is then connected to the carrier's service center 640.

Certain service providers may want the ILEC to continue providing operator  
25 services for "0" calls. In these cases, the service provider will want the ILEC to provide "branding" services, whereby the ILEC plays a recording identifying the service provider prior to handling the call and upon concluding the call. Branding may be accomplished by implementing a method for screening the originating line number in the operator services switches. Calls are routed to the ILEC's operator services  
30 switch. The switch will send a query to determine the service provider. Once the local service provider is identified, the operator services switch will play the correct

branding announcement, process the call, and then play a final branding announcement before releasing the call.

FIGURE 9 is a flow chart illustrating the flow of information during a call from a caller on a non-AIN resold line to a local operator (a "0" call). In step 902, the caller  
5 dials "0". In step 904, the serving switch in the non-AIN end office accesses a line class code to correlate the line class code of the caller's calling line to the appropriate routing identifier. Accordingly, in step 906, the serving switch determines that the line class code table identifies this line as a resold line and for "0" calls, the call should be routed to the AIN hub.

10 In step 908, the call is routed to the AIN hub via a trunk group terminating at a port in the AIN hub. The trunk group, however, has been assigned an AIN off-hook delayed trigger. Thus, in step 910, the AIN hub will suspend the call, collect all of the digits in the call and immediately launch a query to the AIN SCP. The query will include the calling number of the caller and the originally dialed number ("0"). The  
15 AIN SCP launches a service package to determine where this call should be routed. First, in step 912, the AIN SCP determines the local exchange carrier for the caller based upon the calling number. More particularly, the AIN SCP accesses the Calling Party Number-to-Carrier Table in the Line/Carrier database. The AIN SCP obtains a local exchange carrier code. The AIN SCP then accesses the Carrier Routing table.  
20 The AIN SCP obtains the appropriate routing information for the specified exchange carrier code and dialed number in step 914. In step 916, the AIN SCP provides the routing information, the calling number, and the carrier code back to the AIN hub. In step 918, the AIN hub routes the call to the location specified by the AIN SCP using the provided routing instructions.

25 Having thus described a method and system for routing service calls made from resold lines, it should be apparent to those skilled in the art that certain advantages have been achieved. It should also be appreciated that various modifications, adaptations, and alternative embodiments thereof, including the use of multiple AIN hubs and additional SCPs and SCP databases, for example, may be made within the  
30 scope and spirit of the present invention. The invention is further defined by the following claims:

**CLAIMS**What is Claimed is:

1           1. A system for routing a service call made from a calling line resold to a  
2 competitive carrier, the system comprising:  
3           a switch coupled to the resold line, the switch being operative to route the  
4 service call to a service switching point;  
5           a service switching point having a trigger provisioned thereon to cause the  
6 switching point to launch a query to a service control point upon receiving the call  
7 from the switch; and  
8           a service control point operative to receive the query from the service  
9 switching point and to provide routing instructions to the service switching point based  
10 upon resold line routing information stored in at least one database coupled to the  
11 service control point, the routing information identifying a location specified by the  
12 carrier for handling the service call.

1           2. The system for routing a service call, as recited in Claim 1, wherein the  
2 switch is an AIN-capable service switching point.

1           3. The system for routing a service call, as recited in Claim 1, further  
2 comprising a line class code table stored in the switch, the line class code database  
3 storing a line class code corresponding to a class of service of the resold line and  
4 information specifying that calls be routed to the service switching point.

1           4. The system for routing a service call, as recited in Claim 3, wherein the  
2 switch accesses the line class code database to route the call to the service switching  
3 point.

1           5. The system for routing a service call, as recited in Claim 1, wherein the  
2 query includes a directory number of the calling line and a called party number.



1           6. The system for routing a service call, as recited in Claim 1, wherein the  
2 trigger is an off-hook delayed trigger.

1           7. The system for routing a service call, as recited in Claim 1, wherein the  
2 resold line routing information stored in the at least one database further comprises:  
3           an identifier for the directory number of the resold calling line; and  
4           an identifier for the competitive carrier.

1           8. The system for routing a service call, wherein the resold line routing  
2 information includes routing information specifying the location for handling the  
3 service call.

1           9. In an intelligent network, a system for routing a service call made from a  
2 calling line resold to a competitive carrier, the system comprising:  
3           a first network element operative to route the service call to a second network  
4 element;  
5           a second network element operative to cause the second network element to  
6 launch a query to a third network element upon receiving the call from the first  
7 network element; and  
8           the third network element operative to receive the query from the second  
9 network element and to provide routing instructions to the second network element  
10 based upon resold line routing information stored in a storage device coupled to the  
11 third network element, the routing information identifying a location specified by the  
12 competitive carrier for handling the service call;  
13           in response to receiving the routing instructions from the third network  
14 element, the second network element being further operative to route the call to the  
15 location for handling the service call.

1           10. The system for routing a service call, as recited in Claim 9, wherein the  
2 first network element is a switch.

1           11. The system for routing a service call, as recited in Claim 9, wherein the  
2 first network element is a service switching point.

1           12. The system for routing a service call, as recited in Claim 9, wherein the  
2 second network element is a service switching point.

1           13. The system for routing a service call, as recited in Claim 9, wherein the  
2 third network element is a service control point.

1           14. The system for routing a service call, as recited in Claim 9, wherein the  
2 second network element is provisioned with a trigger to cause the second network  
3 element to launch the query.

1           15. The system for routing a service call, as recited in Claim 9, wherein the  
2 resold line routing information stored in the storage device further comprises:  
3           an identifier for the directory number of the calling line; and  
4           an identifier for the service provider.

1           16. The system for routing a service call, as recited in Claim 15, wherein the  
2 resold line routing information includes a routing index specifying the location for  
3 handling the service call.

1           17. The system for routing a service call, as recited in Claim 9, further  
2 comprising a line class code table stored in the switch, the line class code table storing  
3 a line class code corresponding to a class of service of the line and information  
4 specifying that calls be routed to the service switching point.

1           18. A method for routing a service call made from a calling line resold to a  
2 service provider, the method comprising the steps of:  
3           routing the service call to a switch;  
4           routing the service call from the switch to a service switching point;  
5           transmitting a query from the service switching point to a service control point  
6 to determine a location specified by the competitive carrier for handling the service  
7 call, the query including a directory number of the resold calling line and a called  
8 number;  
9           accessing a database containing an identifier for the service provider and an  
10 identifier for the location for handling the service call; and  
11           transmitting the identifier for the location to the service switching point; and  
12           routing the call from the service switching point to the location for handling the  
13 service call.

1           19. The method for routing a service call, as recited in Claim 18, further  
2 comprising the steps of:  
3           accessing a table containing a line class code for the calling line and an  
4 identifier for the location of a trunk group coupled to the service switching point; and  
5           routing the call to the trunk group based upon the identifier for the location of  
6 the trunk group.

1           20. The method for routing a service call, as recited in Claim 18, further  
2 comprising the step of encountering a trigger at the service switching point, thereby  
3 causing the service switching point to launch the query.

1           21. The method for routing a service call, as recited in Claim 20, wherein the  
2 trigger is an off-hook delayed trigger.

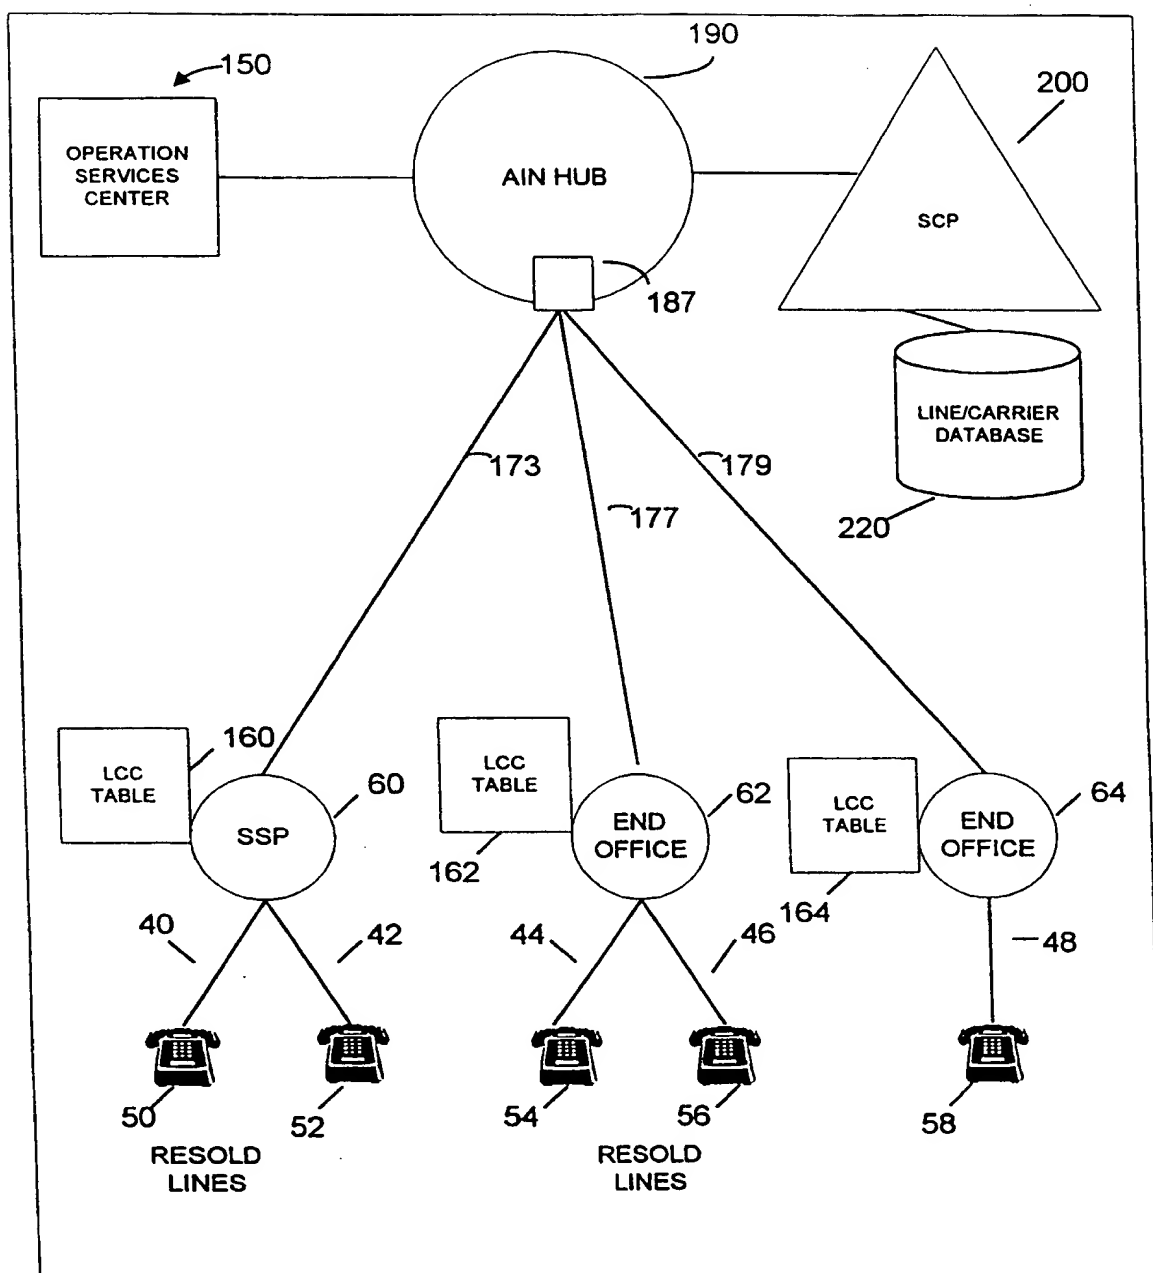


FIGURE 1

2/7

230  
↓240  
↓250  
↓260  
↓270  
↓220  
/

LCC	OPERATOR-ASSISTED	611	411	ROUTING INFORMATION
10	YES	YES	YES	9047
12	YES	NO	YES	9034
13	NO	YES	YES	9014
14	NO	NO	YES	9074
110	YES	YES	YES	8046
112	YES	NO	YES	8034
113	NO	YES	YES	8046
114	NO	YES	YES	8028
210	YES	YES	YES	6014
212	NO	NO	YES	6074
213	NO	YES	YES	6046
214	NO	YES	YES	6087

FIGURE 2

310 ↓	320 ↓	330 ↓	340 ↓	350 ↓	30 /
LCC	OPERATOR-ASSISTED	611	411	ROUTING INFORMATION	
10	YES	YES	YES	9047	
12	YES	NO	YES	9034	
13	NO	YES	YES	9014	
14	NO	NO	YES	9074	
110	YES	YES	YES	AIN HUB	
112	YES	NO	YES	AIN HUB	
113	NO	YES	YES	AIN HUB	
114	NO	NO	YES	AIN HUB	

FIGURE 3

4/7

400 ↙

DIRECTORY #	LOCAL EXCHANGE CARRER
213-444-1111	608
213-444-2222	604
213-444-3333	605

420                      440

FIGURE 4

500 ↙

LOCAL EXCHANGE CARRER	CALL TYPE #1	CALL TYPE #2	CALL TYPE #3
603	RI197	770-473-8903	60193
604	404-983-0928	10493	63847
605	RI308	RI314	770-673-5498

520                      530                      540                      550

FIGURE 5

5/7

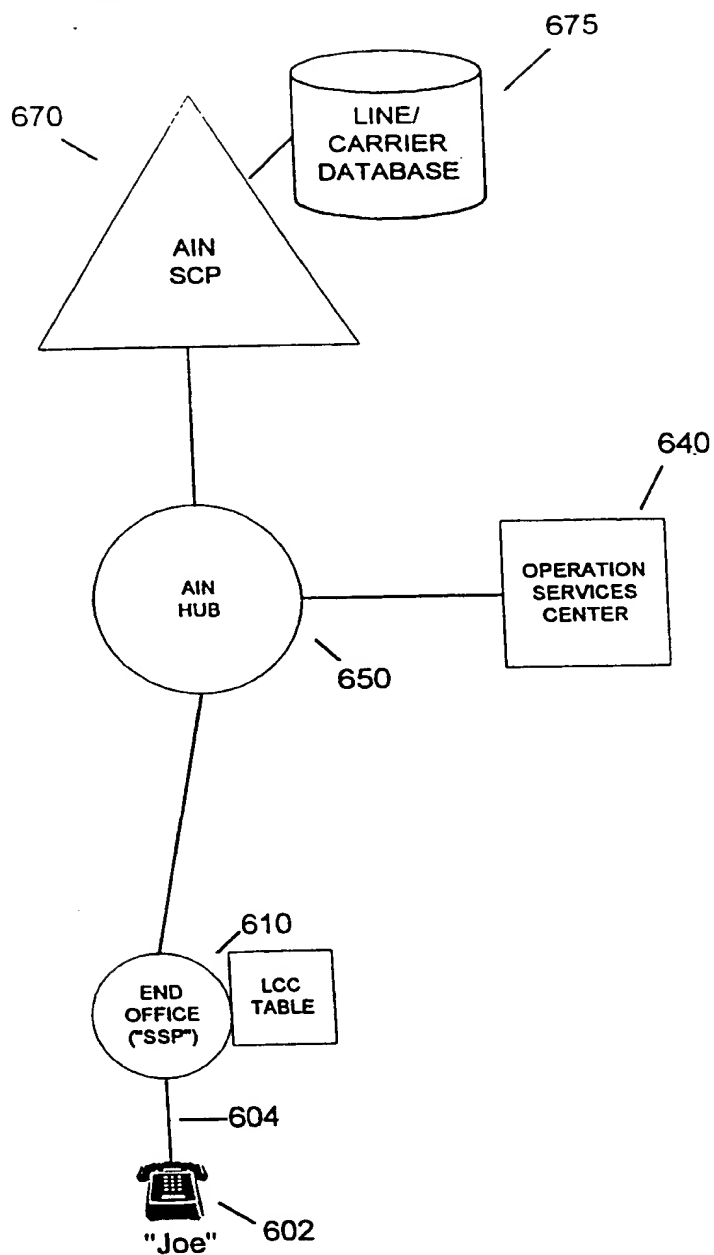


FIGURE 6



6/7

700 ↙

DIRECTORY #	LOCAL EXCHANGE CARRER
770-555-1234	604
770-444-1234	605
770-333-1234	606

720                      740

FIGURE 7

800 ↙

LOCAL EXCHANGE CARRER	411 Calls	Operator Calls	611 Calls
604	RI209	RI183	RI215
605	RI109	RI109	RI234
606	RI308	RI314	RI346

820              830              840              850

FIGURE 8

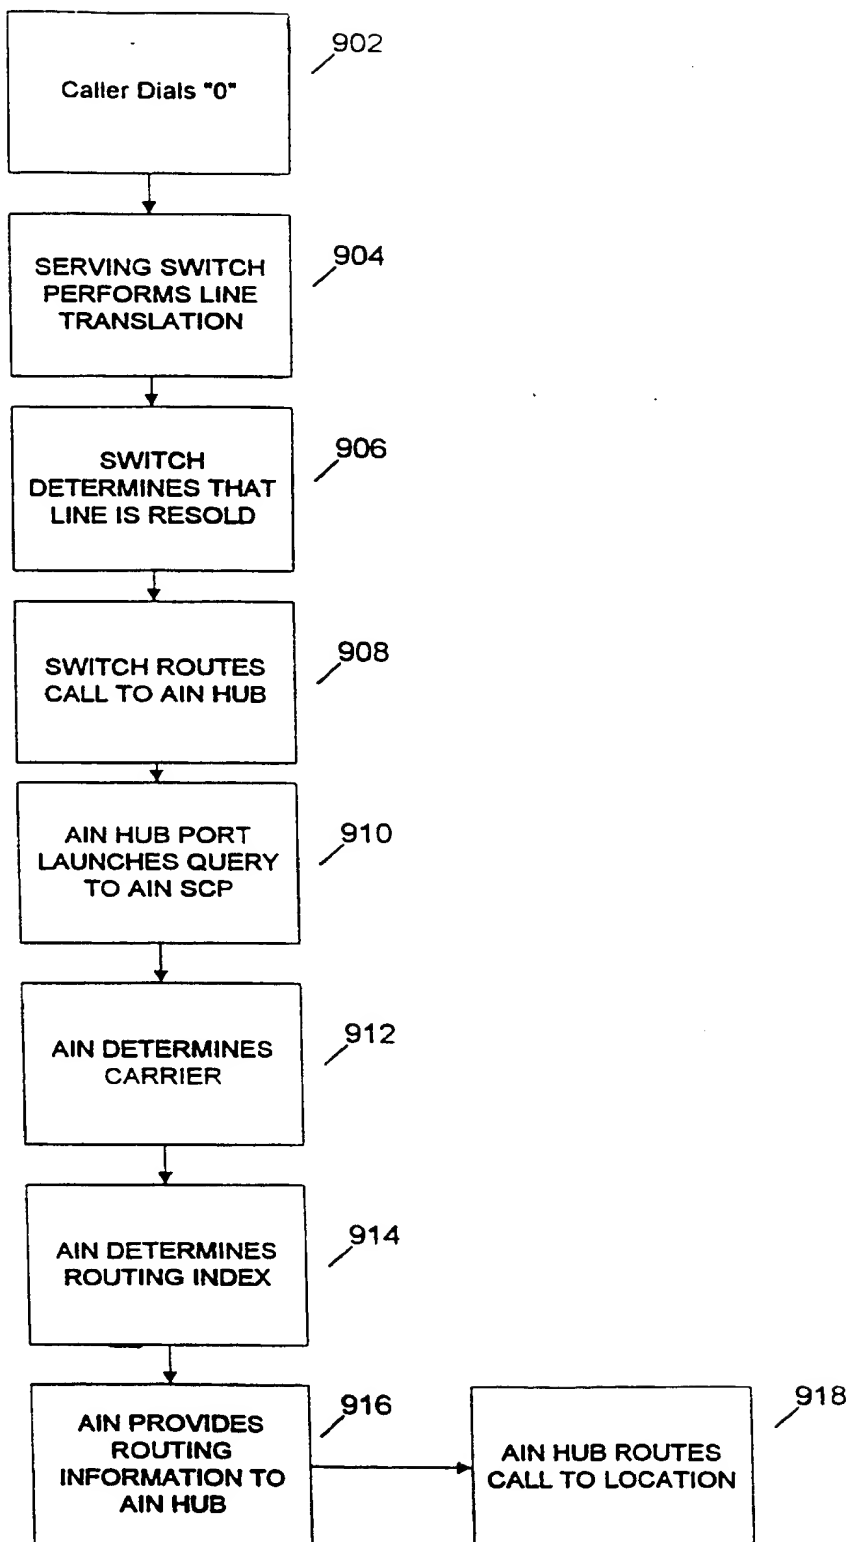


FIGURE 9

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/23443**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :H04M 7/00

US CL :379/220

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 379/220

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
noneElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
none**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,475,749 A (AKINPELU et al) 12 December 1995, see entire document	1-21
Y	US 5,550,912 A (AKINPELU et al) 27 August 1996, see entire document	1-21
Y,P	US 5,796,813 A (SONNENBERG) 18 August 1998, see entire document	1-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

04 JANUARY 1999

Date of mailing of the international search report

12 APR 1999

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

CREIGHTON SMITH

Telephone No. (703) 308-2488